




DLG 545-300RGBW

ARC 545-300RGBW IP65 ARCHITECTURAL WASH LIGHT

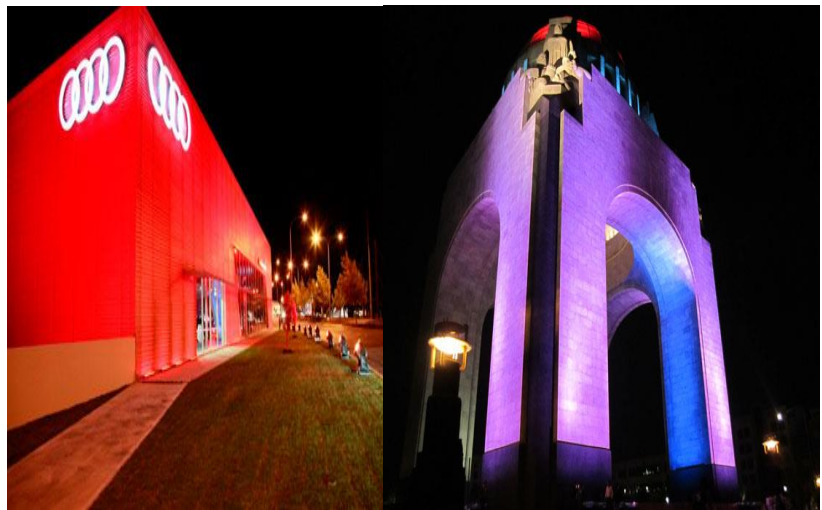

The DLG ARCH 545 RGBW is a very robust and reliable product with IP65 rate. High luminous flux generated, particularly suitable to light up wide surfaces for final applications such as commercial malls and retails, historical and cultural monuments and generally large façades.

Using 54 High Power LEDs of 5W each incorporated in groups of 4 RGBW and coupled with a quad lens the ARCH545 allows to achieve an high luminous flux as well as an optimum color mixing.



- **SOURCE**

54 (5W) LEDs

54pcs*5W LEDs (RED:12pcs, GREEN:14pcs, Blue:14pcs, White:14pcs)

12000 total lm (lm: 4500 W, 2200 R, 4200 G, 1200 B)

- **OPTIC**

25mm quad lenses standard 23° (±11.5°)

On request:

- 40° (±20°) quad lenses

- **TILT**

manual 210°

- **CONTROL**

Standard interface: RS-485; opto-couplet input Protocol: USITT DMX 512

- **SETUP AND CONFIGURATION**

Control panel with touch control technology.

Alphanumeric LCD display with flip function.

Dedicated DMX channel for white balance.

DMX or automatic mode with MASTER/SLAVE function.

Flicker free function.

- **IP RATE**

IP 65 fixture, included main power and DMX cable connections

- **POWER SUPPLY**

Switching power supply (universal main voltage)

Rated voltage: 100-240V~; 50-60Hz

Rated power: 300W

Rated current: 1,5A @ 230V - fuse T3,15A

Active Power Factor Correction

- **DMX CHANNELS**

- mode 8 ch

- mode 4 ch

- **PHYSICAL**

31cmx31cm x34cm

WxDxH: 310 x 310(max) x 340(max) mm

Weight: 8 kg.