



light masterpiece 2017

Studio Due®
emotion and creativity in light





With over 30 years of innovation, design and manufacturing experience Studio Due has been creating state-of-the-art lighting solutions to support lighting designers, architects and lighting consultants in their challenges. Through constant research and innovation, and the use of premier-quality materials, we have established an international reputation as one of the market leaders in the field of professional and architectural lighting.

Our product range which historically comprised of moving head spots, outdoor multiray effects and controllers has diversified with the introduction of new lines of colour change products specifically designed to satisfy the requirements of the architectural lighting market, adapting our traditional portfolio to accomodate demand for new technology requirements.

The LED lighting market is rapidly growing and presents opportunities to help to reduce energy consumption and the reduction in the quantity of materials that are wasted.

As a forward thinking manufacturer we have taken up this challenge.



emotion
and
creativity
in light

Note: lumen values declared by the LED manufacturer.
They must be multiplied by the efficiency of the optics used.

Conform to the european directives



Heat dissipation system



Forced heat dissipation system
(with fan)



IP rating protection degree



Type of optics



Type of optics with rectangular projection



Type of optics - reflector



Fixture with battery rechargeable system



Fixture that can mount the
optional wireless DMX receiver



Fixture with RDM - DMX protocol




Fixture with LED source system



Color LED type source



Monochromatic LED type source



White Balance LED source





We will produce highly reliable and high performance lighting solutions for the main market sectors at a competitive prices to provide an excellent level of customer satisfaction.

We will continue to develop product based on innovative ideas to assist our customers in meeting their lighting requirements in the following market sectors:

General Lighting
Architectural Lighting
Urban Lighting
Industrial Lighting
Retail / Commercial Lighting
Stage / Entertainment
Lighting

We will strive to satisfy price expectations, and provide sophisticated and functional lighting solutions, with an energy conscious approach. Low power consumption, longevity, high luminous yield, reduced maintenance just to emphasize a few milestones of our mission.

INDEX

LED WALL WASHER



- 11 Citycolor LED
- 12 T-Color 6C
- 13 T-Color
- 14 T-Bright Plus
- 15 Dual 80
- 16 Single 40-20
- 17 Citybeam LED 24-12
- 35 Studioled 600

LED LINEAR BAR



- 18 Archibar SL300
- 19 Archibar SL200
- 20 Archibar SL100
- 21 **Archi 40** > new
- 22 **Archibar ST80** > new
- 23 **Archibar IC** > new
- 24 Slimbar
- 25 **Slimbar Flat** > new

LED SPOTS



- 26 **Archiled 200** > new
- 27 Parled 200 PRO IP67
- 28 Parled 200 PRO
- 29 Parled 100
- 30 Aria series
- 31 ParBar

BATTERY LED FIXTURES



- 32 Easycolor Compact

INGROUND LED FIXTURES



- 33 **Terra Plus** > new
- 34 Terra series

CYM WALL WASHER



- 36 Citycolor-Citybeam

OUTDOOR MULTIRAY EFFECTS



- 37 Dominator 6600
- 38 Spaceflower 3000

INDEX

WHITE BALANCE and
MONOCHROMATIC fixtures

WHITE BALANCE LED FIXTURES



40 T-Bright 400 WB
41 WR 80 WB

LED LINEAR BAR



42 Archibar SL200 WB - M
43 Archibar SL100 WB - M
44 **Archibar ST80** > *new*
45 Slimbar
46 **Slimbar Flat** > *new*

LED SPOTS



47 Parspot 150 M
48 Parled 100 M
49 Pin Light
50 Aria series

HIGH BAY LED FIXTURES



51 CL 160-80 WR
52 CL 120-60 WL
53 CR-i 80-40
54 CL-i 80-40

LED WALL WASHER



55 WR 80-40
56 WL 60-30

INGROUND LED FIXTURES



57 Terra series

LED WALL WASHER



58 WS 200-100
59 STR 60-40-30

CONTROLLERS



60 Controllers



Villa Pisani - Italy

outdoor series



CITYCOLOR LED

RGBW

led wall washer 11

- Same light output of traditional Citycolor.
- 1/3 of its power consumption.
- 1/3 of its weight.
- Up to 65° wide beam angle.

[Optional all models]

- Frame holder
- Barndoor
- Anti glare kit
- Frost filter 65° kit
- XLR-Powercon adapter
- Wireless DMX receiver
- Flight Case

Particularly suitable to light large surfaces.


Standard fixture colour finishing is black.

Optional: grey and white (art. FX-COLOUR).

Optional: marine grade treatment.



ITEM	FIXTURE	CITYCOLOR LED [KEY features]	CITYCOLOR LED/E [KEY features]
LEDs	RGBW LED	120 RGBW/FC CREE XML (16W)	120 RGBW/FC EDISON FEDERAL 5050 (12W)
Total light power			580W
Lumen		R 9000, G 16000, B 2800, W 20000	R 8000, G 14000, B 2600, W 18000
Optics		Square Open (20°x30°) 38 mm - On request: medium, wide and narrow beam	
Power consumption			600W
Voltage range		Universal 100 - 240Vac	
Physical		680x145x640 mm	
Weight		32 Kg	

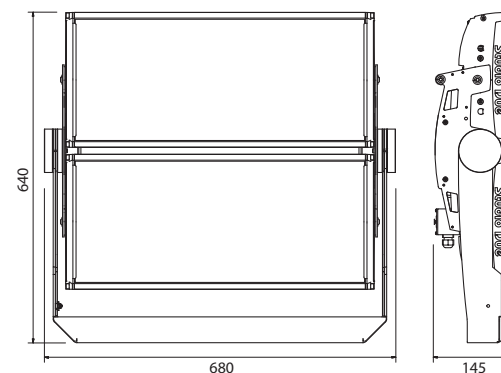

art. 13021: CITYCOLOR LED RGBW
art. 1302/E: CITYCOLOR LED/E RGBW





Turbo-COLOR 6C

RGBWA + UV

- The most powerful single-head wall washer colorchanger.
- Compact and lightweight.
- Touch control panel.
- 6 colours: RGBW+Amber+UV (black light).
- Up to 65° wide beam angle.


[Optional]

- Barndoor
- Frost filter 65°
- Wireless DMX receiver
- Handle for easy transport
- Fixing counterplate
- Flight Case

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBWA+UV	63 RGBW/FC + 18 PC-AMBER + 18 UV (black light)
Total light power		600W
Lumen		R 5600, G 9000, B 1600, W 11400, A 5000, UV18000mW
Optics		Square Open (20°x30°) 38 mm On request: medium, wide and narrow beam
Power consumption		650W
Voltage range		Universal 100 - 240Vac
Physical		656x159x365 mm
Weight		15,9 Kg

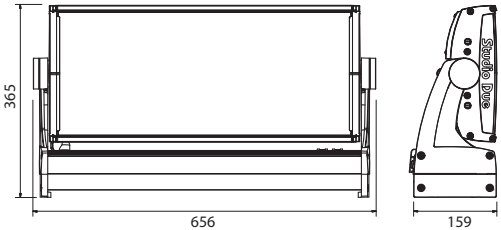



Turbo-COLOR

RGBW

led wall washer 13

- Tremendous light output.
- Touch control panel.
- Rectangular and uniform light projection.
- Up to 65° wide beam angle.


[Optional]

- Barndoor
- Frost filter 65°
- Wireless DMX receiver
- Flight Case

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	60 RGBW/FC (16W)
Total light power		400W
Lumen		R 6000, G 10000, B 1800, W 12000
Optics		Square Open (20°x30°) 38 mm On request: medium, wide and narrow beam
Power consumption		430W
Voltage range		Universal 100 - 240Vac
Physical		613x184x420 mm
Weight		19 Kg

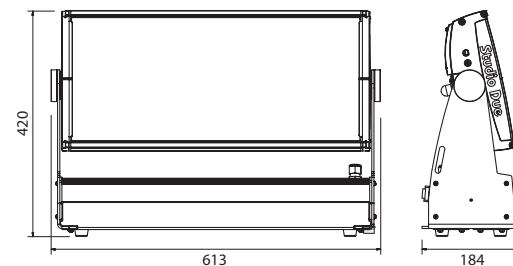

art. 1405: T-COLOR RGBW





T-BRIGHT PLUS

RGBW

- Very powerful wall washer colorchanger.
- Extremely compact and lightweight.
- Touch control panel.
- Up to 65° wide beam angle.


[Optional]

- Barndoor
- Frost filter 65°
- Wireless DMX receiver
- Handle for easy transport
- Fixing counterplate
- Flight Case

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.
On request T-BRIGHT 500 version.



ITEM	FIXTURE	T-BRIGHT Plus [KEY features]
LEDs	RGBW	45 RGBW/FC CREE XML (16W)
Total light power		340W
Lumen		R 4000, G 6100, B 1200, W 8100
Optics		Square Open (20°x30°) 38 mm On request: medium, wide and narrow beam
Power consumption		350W
Voltage range		Universal 100 - 240Vac
Physical		425x159x365 mm
Weight		9,8 Kg

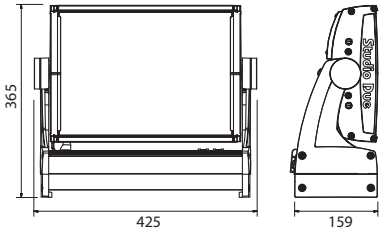

art. 1603: T-BRIGHT PLUS RGBW
art. 1525: T-BRIGHT 500 RGBW (on request)





DUAL 80

RGBW

led wall washer 15

- Very wide light output
- Large diameter lenses
- Touch control panel
- Up to 65° wide beam angle

[Optional]


- Frame holder
- Barndoor
- Anti glare kit
- Frost filter 65° kit
- Wireless DMX receiver
- Flight Case

Two independent heads, the LEDs are driven and can be operated separately.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	80 RGBW/FC (16W)
Total light power		560W
Lumen		R 6000, G 12000, B 1850, W 13500
Optics		medium beam (45 mm) On request: wide and narrow beam
Power consumption		580W
Voltage range		Universal 100 - 240Vac
Physical		657x182x641 mm
Weight		32 Kg

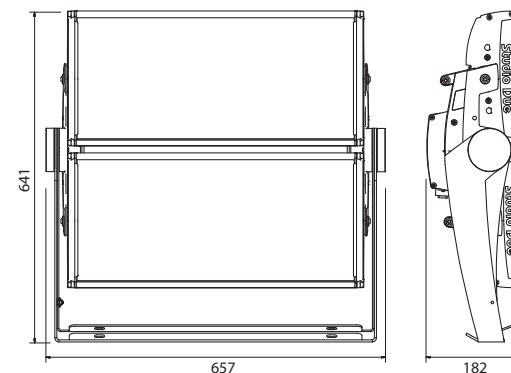

art. 1406: DUAL 80 RGBW





SINGLE 40-20

RGBW

- Wide beam
- Superb color mixing
- Large diameter lenses
- Touch control panel
- Up to 65° wide beam angle

[Optional all models]

- Barndoor
- Frost filter 65°
- Wireless DMX receiver
- Flight Case

Compact LED Lighting fixtures with a large and uniform light output.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.







Single 40



Single 20

ITEM	FIXTURE	SINGLE 40 [KEY features]	SINGLE 20 [KEY features]
LEDs	RGBW	40 RGBW/FC (16W)	20 RGBW/FC (16W)
Total light power		280W	140W
Lumen		R 3000, G 6000, B 925, W 6750	R 1500, G 3000, B 460, W 3400
Optics		medium beam (45 mm lenses) - On request: wide and narrow beam	
Power consumption		300W	160W
Voltage range		Universal 100 - 240Vac	
Physical		613x185x415 mm	355x185x415 mm
Weight		19 Kg	12 Kg

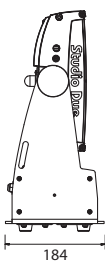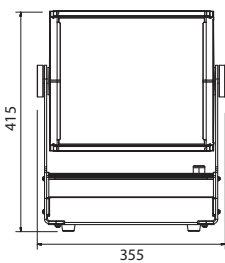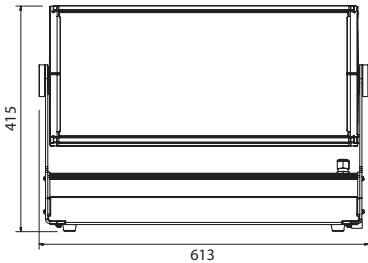

art. 1403: SINGLE 40 RGBW
art. 1402: SINGLE 20 RGBW





CITYBEAM LED 24-12

RGBW

- Astonishing level of brightness up to 250 mt
- High Power 20W RGBW LEDs
- 5° very narrow beam
- Touch control panel
- Energy efficient

[Optional all models]

- Barndoor
- Wireless DMX receiver
- Flight Case

To reach impressive heights, no matter how complex it is, the CityBeam LED line is the right solution.

Standard fixture colour finishing is black.

Optional: grey and white (art. FX-COLOUR).

Optional: marine grade treatment.







Citybeam LED 24



Citybeam LED 12

ITEM	FIXTURE	CITYBEAM LED 24 [KEY features]	CITYBEAM LED 12 [KEY features]
LEDs	RGBW	24 RGBW/FC (20W)	12 RGBW/FC (20W)
Total light power		288W	144W
Lumen		R 3000, G 5000, B 900, W 6000	R 1500, G 2500, B 450, W 3000
Optics		5° very narrow beam (45 mm lenses) - On request: wide and medium beam	
Power consumption		300W	150W
Voltage range		Universal 100 - 240Vac	
Physical		613x185x415 mm	355x185x415 mm
Weight		19 Kg	12 Kg

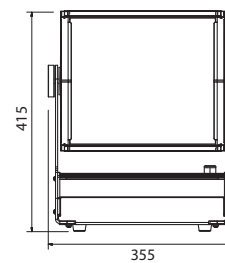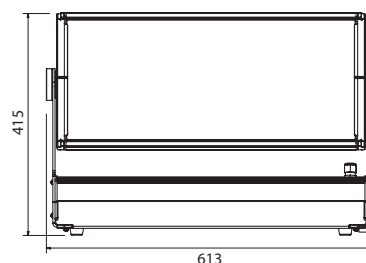

art. 1304: CITYBEAM LED 24 RGBW

art. 1303: CITYBEAM LED 12 RGBW





ARCHIBAR SL300

RGBW

- 3 different measures
- High powerful LEDs
- Touch control panel
- Robust and reliable aluminium case

[Optional]

- Wireless DMX receiver
- Fixing counterplate



Robust and reliable aluminium case, is suitable for architectural and entertainment applications.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



The rear base of the fixture with the touch control panel

ITEM	FIXTURE	90cm standard	60cm	120cm
LEDs	RGBW	15 RGBW/FC (20W)	10 RGBW/FC (20W)	20 RGBW/FC (20W)
Total light power		140W	93W	185W
Lumen		R 1400, G 2300, B 450, W 3300	R 900, G 1500, B 400, W 2200	R 1800, G 3000, B 800, W 4400
Optics		medium beam (45 mm lenses) - On request: narrow, wide and 10°x90° beam		
Power consumption		150W	100W	200W
Voltage range		Universal 100 - 240Vac		
Physical		925x110x93 (profile dim.)	632x110x93 mm (profile dim.)	1222x110x93 mm (profile dim.)
Weight		6,7 Kg	-	-

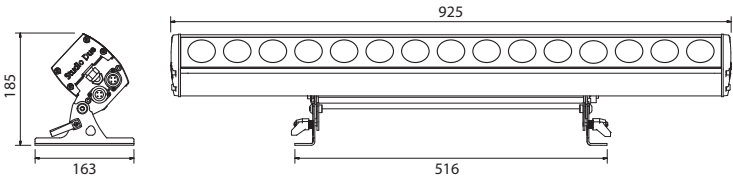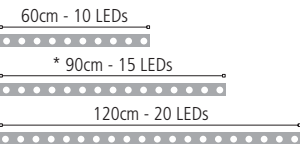

art. 1519: ARCHIBAR SL300 RGBW





ARCHIBAR SL200

RGBW

led linear bar 19

- 4 different measures
- High powerful LEDs
- Touch control panel
- Robust and reliable aluminium case

[Optional]

- Wireless DMX receiver
- Fixing counterplate

Robust and reliable aluminium case, is suitable for architectural and entertainment applications.

Standard fixture colour finishing is grey.



Optional: black and white (art. FX-COLOUR).

Optional: marine grade treatment.




The rear base of the fixture with the touch control panel

ITEM	FIXTURE	90cm standard	60cm	120cm	150cm
LEDs	RGBW	15 RGBW/FC	10 RGBW/FC	20 RGBW/FC	25 RGBW/FC
Total light power		100W	67W	134W	167W
Lumen		R 1150, G 2200, B 350, W 2500	R 770, G 1470, B 230, W 1670	R 1540, G 2940, B 460, W 3340	R 1920, G 3670, B 580, W 4170
Optics		medium beam (38 mm lenses) - On request: narrow and wide beam			
Power consumption		105W	70W	140W	175W
Voltage range		Universal 100 - 240Vac			
Physical		925x110x93 mm (profile dim.)	632x110x93 mm (profile dim.)	1222x110x93 mm (profile dim.)	1517x110x93 mm (profile dim.)
Weight		6,7 Kg	-	-	-

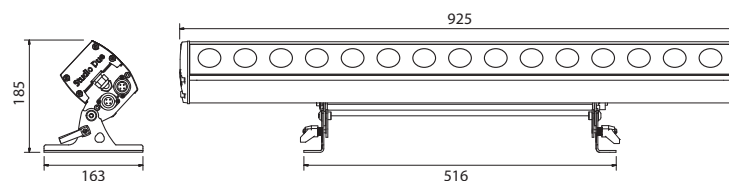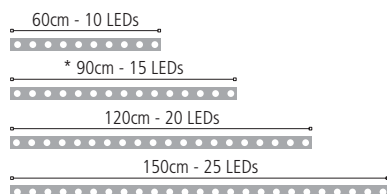

art. 1518: ARCHIBAR SL200 RGBW





ARCHIBAR SL100

RGBW

- 4 different measures
- Configuration by DRS Setup
- Robust and reliable aluminium case



[Optional]

- Fixing counterplate

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	90cm standard	60cm	120cm	150cm
LEDs	RGBW	7 RGBW/FC	5 RGBW/FC	9 RGBW/FC	11 RGBW/FC
Total light power		49W	35W	63W	77W
Lumen		R 600, G 1000, B 180, W 1200	R 550, G 720, B 130, W 860	R 780, G 1290, B 235, W 1560	R 950, G 1580, B 285, W 1890
Optics		medium beam (38 mm lenses) - On request: narrow and wide beam			
Power consumption		55W	43W	69W	85W
Voltage range		Universal 100 - 240Vac			
Physical		944x93x115 mm	664x93x115 mm	1212x93x115 mm)	1484x93x115 mm
Weight		3,8 Kg	-	-	-

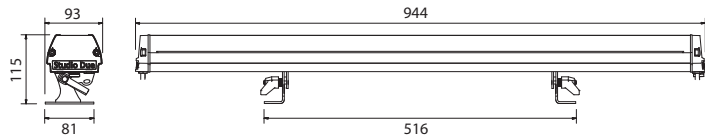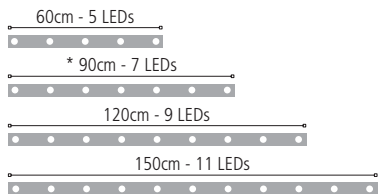

art. 1517: ARCHIBAR SL100 RGBW





ARCHI 40

RGBW

led linear bar 21

- Compact design, small form factor
- Configuration by DRS Setup
- Robust and reliable aluminium case

[Optional]

- Fixing counterplate

ARCHI 40 is a small and compact LED wall washer fixture.

Standard fixture colour finishing is grey.


Optional: black and white (art. FX-COLOUR).

Optional: marine grade treatment.

new



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	8 RGBW/FC
Total light power		56W
Lumen		R 700, G 900, B 210, W 1400
Optics		medium beam (38 mm lenses) On request: narrow and wide beam
Power consumption		60W
Voltage range		Universal 100 - 240Vac
Physical		325x110x91,4 mm (profile dim.)
Weight		2,6 Kg

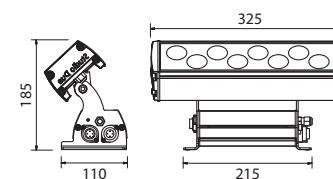

art. 1702: ARCHI 40 RGBW





ARCHIBAR ST80

RGBW

- 3 different measures
- Configuration by DRS Setup
- Robust and reliable aluminium case

[Optional]




- Fixing counterplate

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.

new



ITEM	FIXTURE	standard 100cm [KEY features]	50cm [KEY features]	150cm [KEY features]
LEDs	RGBW	28+28+28+28 Red-Green-Blue-Cold W	14+14+14+14 Red-Green-Blue-Cold W	42+42+42+42 Red-Green-Blue-Cold W
Total light power		32W	16W	48W
Lumen		R 460, G 950, B 260, W 1300 (CW)	R 230, G 475, B 130, W 650 (CW)	R 690, G 1425, B 390, W 1950 (CW)
Optics		120° beam		
Power consumption		40W	20W	60W
Voltage range		Universal 100 - 240Vac		
Physical		1004x93x115 mm	526x93x115 mm	1481x93x115 mm
Weight		3,5 Kg	-	-

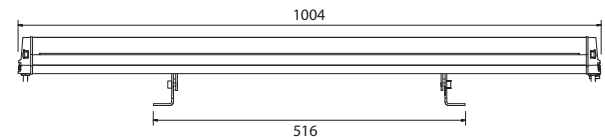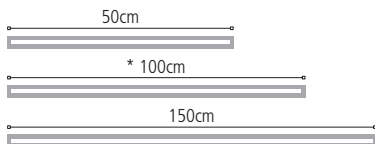

art. 1740: ARCHIBAR ST80 RGBW





ARCHIBAR IC RDM

RGBW INDIVIDUAL CONTROL

led linear bar 23

- Individual control of each led
- 100 cm or 50 cm lenght with (10 or 5 LEDs)
- RDM - DMX protocol
- Daisy chain (power and DMX)

[Optional]

- Fixing counterplate

Two version for this fixture:

- 230 Vac with internal power supply (rear base)
- 48VDC (external power supply without base)

Standard fixture colour finishing is black.



Optional: grey and white (art. FX-COLOUR).

Optional: marine grade treatment.

new



ITEM	FIXTURE	ARCHIBAR IC [KEY features]	ARCHIBAR IC low voltage [KEY features]
LEDs	RGBW	10 RGBW/FC individual control	
Total light power		90W	
Lumen		R 800, G 1300, B 230, W 1600	
Optics		medium beam (45 mm lenses) - On request: narrow, wide and 10°x90° beam	
Power consumption		110W	100W
Voltage range		Universal 100-240Vac	
Power supply			48VDC
Physical		1012x163x185 mm	
Weight		7,3 Kg	-

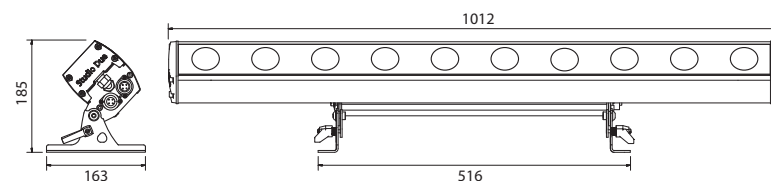

art. 1720: ARCHIBAR IC RDM RGBW
art. 1721: ARCHIBAR IC LV RDM RGBW





SLIMBAR



RGB

- Ultra small form factor aluminium case
- In-Out connectors for fast and easy wiring
- Available 100 cm and 50 cm lenght
- High efficiency RGB LEDs

To drive SLIMBAR FLAT use SLIMBAR PILOT
Fixture colour finishing is grey



ITEM	FIXTURE	100cm [KEY features]	50cm [KEY features]
LEDs	RGB	20 RGB (1,5W)	10 RGB (1,5W)
Total light power		26W	13W
Lumen		1200	600
Optics		medium beam (20 mm lenses)	
Power consumption		28W max	14W max
Power supply		38VDC	
Physical		1000x35x40 mm (profile dim.)	500x35x40 mm (profile dim.)
Weight		1 Kg	0,5 Kg

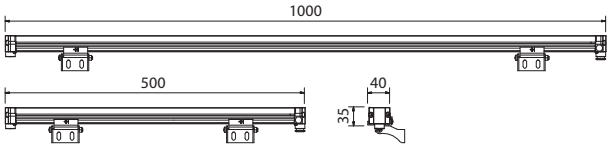



SLIMBAR FLAT

RGBW

led linear bar 25

- Ultra small form factor aluminium case
- In-Out connectors for fast and easy wiring
- Available 100 cm and 50 cm lenght

[Optional]

- Light diffuser

The SLIMBAR FLAT RGBW/FC is an ultra small form factor LED LINEAR BAR with IP67 rating protection.

This kind of LED bar series is then suitable for accent lighting.



To drive SLIMBAR FLAT use SLIMBAR PILOT
Fixture colour finishing is grey.

new



Optional milk light diffuser

ITEM	FIXTURE	100cm [KEY features]	50cm [KEY features]
LEDs	RGBW	28+28+28+28 Red-Green-Blue-Cold White	14+14+14+14 Red-Green-Blue-Cold White
Total light power		32W	16W
Lumen		R 460, G 950, B 260, W 1300 (CW)	R 230, G 475, B 130, W 650 (CW)
Optics		120° beam	
Power consumption		42W max - 0,8A	21W max - 0,4A
Power supply		52VDC	
Physical		1000x46x30,5 mm (profile dim.)	500x46x30,5 mm (profile dim.)
Weight		1 Kg	0,5 Kg

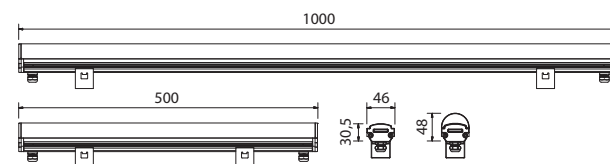

art. 1710: SLIMBAR FLAT RGBW





ARCHILED 200

RGBWA

- Clever design, small form factor
- Touch control panel
- Energy efficiency

[Optional]


- Barndoor
- Wireless DMX receiver

Slim design and robust case, to ensure a very long term reliability specifically for harsh environments.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBWA	16 RGBW + 10 Amber (hi-power LEDs)
Total light power		85W
Lumen		R 1300, G 1800, B 380, W 2500, A 1300
Optics		15° beam (38 mm lenses) On request: narrow and wide beam
Power consumption		90W
Voltage range		Universal 100 - 240Vac
Physical		270x100x303 mm
Weight		4,9 Kg

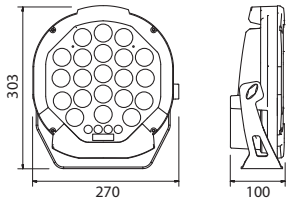



PARLED 200PRO DRS IP67

RGBW

led spot 27

- Compact and lightweight
- Configuration by DRS Setup
- IP 67 PAR colorchanger
- No fan, very quiet operation

[Optional]

- Barndoor
- Wireless DMX receiver


Very robust case, to ensure a very long term reliability specifically for harsh environments.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.




Studio Due®

ITEM	FIXTURE	[KEY features]
LEDs	RGBW	16 RGBW/FC (supplied 600mA)
Total light power		100W
Lumen		8000
Optics		15° beam (38 mm lenses) On request: medium and wide beam
Power consumption		110W
Voltage range		Universal 100 - 240Vac
Physical		330x212x364 mm
Weight		6,5 Kg

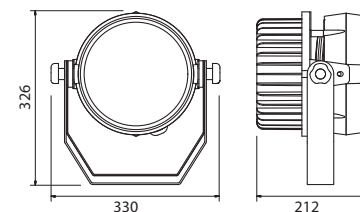

art. 16012: PARLED 200PRO DRS IP67





PARLED 200PRO

RGBW

- Compact and lightweight flood projector
- Control panel with 4 push buttons
- Indoor use

[Optional]


- Barndoor
- Wireless DMX receiver
- Flight Case

Very robust case, to ensure a very long term reliability specifically for harsh environments.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	16 RGBW/FC (supplied 600mA)
Total light power		130W
Lumen		8000
Optics		15° beam (38 mm lenses) On request: medium and wide beam
Power consumption		140W
Voltage range		Universal 100 - 240Vac
Physical		330x212x364 mm
Weight		6,5 Kg

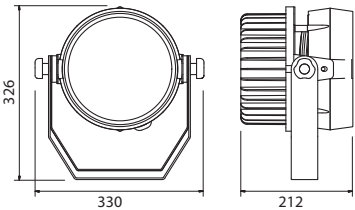



PARLED 100

RGBW

led spot 29

- Clever design, small form factor
- Robust die cast aluminium case
- IP67 or IP20 flood light projector

[Optional]

- Barndoor
- Wireless DMX receiver

Very robust case, to ensure a very long term reliability specifically for harsh environments. Two models with the same performance: version with the control panel (IP20) or with setup by DRS (IP67).

Fixture colour finishing is grey.




(art. 1507) IP67



(art. 1506) IP20

ITEM	FIXTURE	100/FC and 100/FC DRS [KEY features]
LEDs	Monochromatic	7 RGBW/FC (20W)
Total light power		40W
Lumen		R 550, G 1000, B 180, W 1200
Optics		medium beam (32 mm lenses) On request: narrow or wide beam
Power consumption		45W
Voltage range		Universal 100 - 240Vac
Physical		185x140x230 mm
Weight		2 Kg

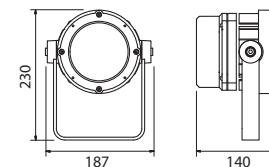

art. 1506: PARLED 100 RGBW
art. 1507: PARLED 100 RGBW DRS IP67





ARIA

RGBW

- Stainless steel spotlights series
- 5, 3, 1 RGBW/FC LEDs

[Optional]

- On board power supply
- Long bracket

Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.

IP 67 rating protection - Optional IP 68
Fixture finishing is steel.
Optional: marine grade version.



AR-L5




AR-L3



M-AR-L1

ITEM	FIXTURE	ARIA L5	ARIA L3	MINI ARIA L1
LEDs	RGBW	5 RGBW/FC (20W)	3 RGBW/FC (20W)	1 RGBW/FC (20W)
Total light power		15W	15W	5W
Lumen		R 380, G 720, B 120, W 800	R 250, G 480, B 80, W 550	R 35, G 80, B 16, W 80
Optics		medium beam (38 mm lenses)	medium beam (45 mm lenses) On request: narrow and wide beam	medium beam (45 mm lens)
Power consumption		Has to work with dedicated power supply		
Power supply		17VDC or 12,5VDC		
Physical		DxH: ø 134x108,5mm DxH: ø 134x143mm (model with on board power supply)		DxH: ø 72x105 mm
Weight		2,5 Kg		0,9 Kg

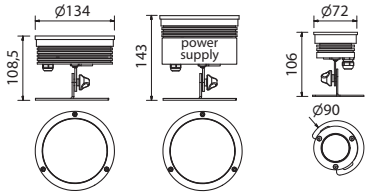

art. 1434: AR-L5 RGBW
art. 1433: AR-L3 RGBW
art. 1540: M-AR-L1 RGBW





PARBAR

RGBW multipar

led spot 31



- Wash LEDs multipar RGBW/FC system
- 4 independent controllable heads
- Quick multipar mounting system

Possibility of assembly with two types of brackets.
Bracket for mounting 2 Parbar.
Bracket for mounting 4 Parbar.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	14x4 RGBW
Total light power		370W
Lumen		R 4000, G 7000, B 1200, W 8500
Optics		15° beam (38 mm lenses) - On request: medium and wide beam
Power consumption		400W
Voltage range		Universal 100 - 240Vac
Physical		1250x160x340 mm
Weight		16,5 Kg

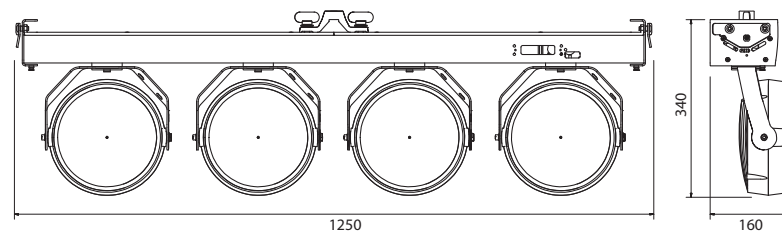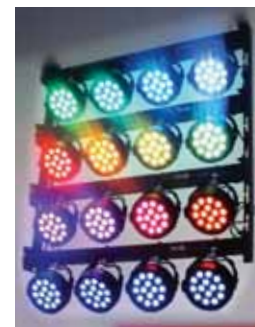

art. 1510: PARBAR RGBW





EASYCOLOR COMPACT

RGBW WIRELESS and RECHARGEABLE

- Charge
- Place it
- Light up
- High performance lithium battery

[Optional]


- Flight Case (with integrated charging system)

10 hours battery working autonomy
Particularly suitable for events where set - up time is problematic, and the passage of cables is hard.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	12x6W (4W in battery mode)
Total light power		60W
Lumen		R 900, G 1620, B 360, W 1800 (main supply) R 600, G 1080, B 240, W 1200 (battery supply)
Optics		medium beam (38 mm lenses) - On request: wide and narrow beam
Power consumption (max)		120W (with low battery)
Voltage range		Universal 100 - 240Vac
Physical		345x170x405 mm
Weight		10 Kg

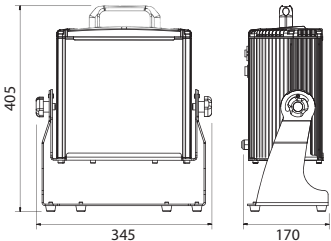



TERRA PLUS RDM

RGBW


- Inground LED fixture
- 12 RGBW/FC LEDs
- 180° pan - 10° tilt
- RDM - DMX protocol

Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.

IP 67 rating protection
Fixture colour finishing is grey



ITEM	FIXTURE	[KEY features]
LEDs	RGBW	12 RGBW
Total light power		40W
Lumen		R 600, G 1100, B 170, W 1200
Optics		15° beam (38 mm lenses) - On request: medium and wide beam
Power consumption		45W
Voltage range		Universal 100 - 240Vac
Physical		DxH: ø 256x200mm
Weight		5,5 Kg

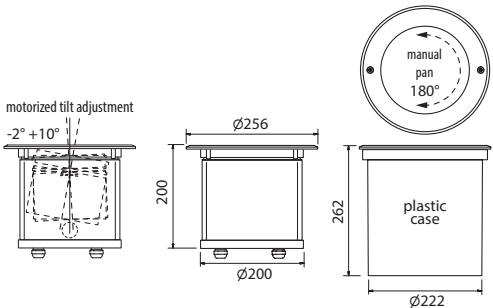



TERRA

RGBW

- Stainless steel inground series
- 5, 3, 1 RGBW/FC LEDs

[Optional]

- Plastic case
- On board power supply

Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.


IP 67 rating protection - Optional IP 68
Standard fixture finishing is steel.
Optional: marine grade version.



TER-L5
(version with
on board power supply)




TER-L3

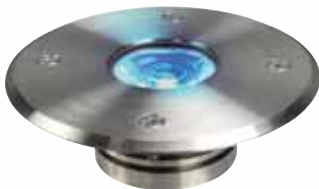

M-TER-L1

ITEM	FIXTURE	TERRA L5	TERRA L3	MINI TERRA L1
LEDs	RGBW	5 RGBW/FC (20W)	3 RGBW/FC (20W)	1 RGBW/FC (20W)
Total light power		15W	15W	5W
Lumen		R 380, G 720, B 120, W 800	R 250, G 480, B 80, W 550	R 35, G 80, B 16, W 80
Optics		medium beam (38 mm lenses)	medium beam (45 mm lenses) On request: narrow and wide beam	medium beam (45 mm lens)
Power consumption		Has to work with dedicated power supply		
Power supply		17VDC or 12,5VDC		
Physical		DxH: ø 190x47,5mm DxH: ø 190x82mm (model with on board power supply)		DxH: ø 130x42 mm
Weight		2,5 Kg		0,9 Kg

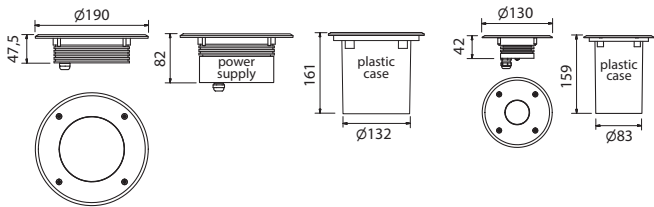

art. 14014: TER-L5 RGBW
art. 14013: TER-L3 RGBW
art. 1440: M-TER-L1 RGBW





STUDIOLED 600

RGBWA

led wall washer 35

- Zoom from 15° to 40°
- RGBWA wash lighting
- Very high luminous flux

Suitable both for outdoor use to valorize buildings and historical monuments.


Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.

from 15° to 40°

zoom



ITEM	FIXTURE	[KEY features]
LEDs	RGBWA	22 powerful RGBW+A LEDs arrays
Total light power		450W
Lumen		R 3500, G 7000, B 2000, W 6000, A 1500
Optics		52mm motorized optic system - Zoom from 15° to 40°
Power consumption (max)		500W
Voltage range		Universal 100 - 240Vac
Physical		670x240x470 mm
Weight		31 Kg

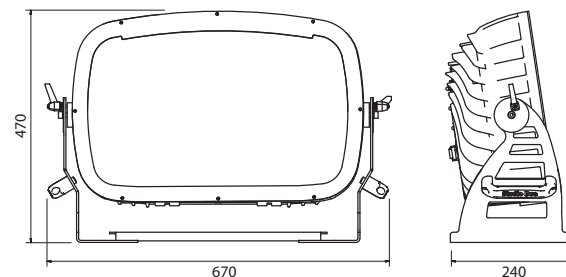

art. 1001: STUDIOLED 600 RGBWA





CITYCOLOR-CITYBEAM

CYM system

Available with 2500W and 1800W power, the most famous and world-wide appreciated CityColor.

The CYM colorchanger system (international patent) is used on all models and makes it possible to light up a surface of about 10x15 mts with the fixture placed over a distance of 10 mts. (patent no. WO99/40361)

Citybeam projectors are a powerful light beam with an extremely efficient optic system (patent no. WO99/40361), which can create numerous colour shades.


Available with 2000 watt power, the Citybeam (completely made in Italy) can cover a surface of about 130 m2 by keeping the lighting values higher than 1100 lux over a distance of 60 meters!



citycolor 2500W and 1800W



citybeam 2000W

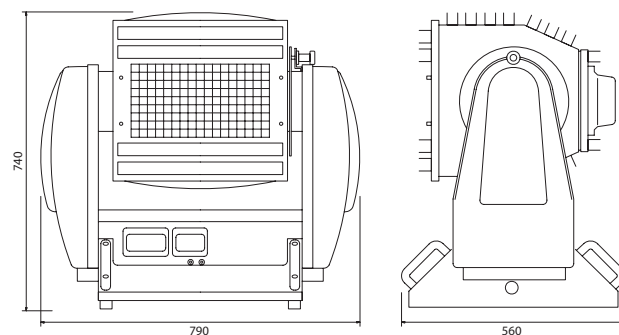

art. 0003: CITYCOLOR 2500W IP54

art. 0002: CITYCOLOR 1800W IP54

art. 0203: CITYBEAM 2000W IP54



DOMINATOR 6600

Multirays effect


outdoor multirays effects 37

The Dominator 6000W becomes in absolute the most powerful unit among the outside multirays effects.

Its exceptional power make it visible to longer distances also under unfavourable atmospheric conditions (like dry and clean air). Its effect consist in the rotating, opening and closing of the two circles of 12 rays each, but the shutter.

[KEY features]

- Lamp: HMI 6000W (thermal protection)
- WxDxH: 520x910x1020 mm
- Weight: 65 Kg

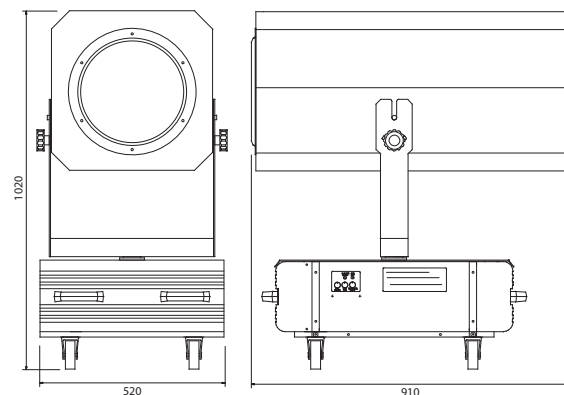

Studio Due®




SPACEFLOWER 3300

Multirays effect

The Spaceflower 3000W is very useful even for stage and show performances. Its effect consist in the rotating, opening and closing of the three circles of 12 rays each.

[KEY features]

- Lamp: STI 3000W (thermal protection)
- WxDxH: 450x685x772 mm
- Weight: 50 Kg

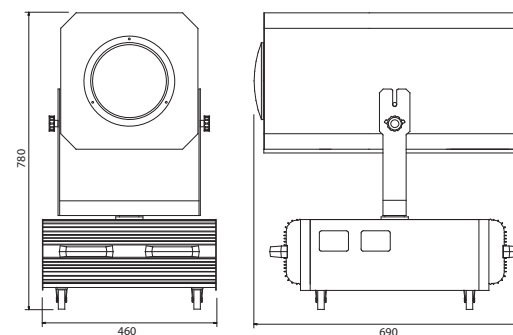

art. 93052: with shutter with DMX board



white balance
monochromatic series





T-BRIGHT 400 WB

White Balance

- Two versions for this white balance luminaire
- High efficient 70°x55° innovative optic system with antiglare reflectors or 38mm lenses
- White Balance

[Optional]

- Barndoor
- Frost filter 65°
- Wireless DMX receiver

The T-BRIGHT 400 White Balance is particularly adapt for temporarily events and can also be used easily for permanent installations.

Standard fixture colour finishing is black.
Optional: grey and white (art. FX-COLOUR).
Optional: marine grade treatment.




T-Bright / WR




T-Bright / WL

ITEM	FIXTURE	[KEY features]
LEDs	WHITE BALANCE	60 high power white (30 - 2900K + 30 - 6000K)
Total light power		270W
Lumen		18000 cool w + 15000 warm w
Optics	T-BRIGHT WR	70°x55° (antiglare square reflectors)
	T-BRIGHT WL	medium beam (38 mm lenses) - On request: narrow and wide beam
Power consumption		300W
Voltage range		Universal 100 - 240Vac
Physical		410x184x412 mm
Weight		13 Kg

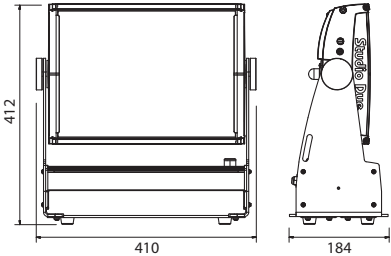

art. 15252: T-BRIGHT 400 WL with lenses
art. 15251: T-BRIGHT 400 WR with reflectors





WR 80 WB

White Balance

- High efficient 70°x55° innovative optic system with antiglare reflectors
- Color temperature 3000K - 5000K
- White Balance

[Optional]


- Barndoor
- Frost filter 65°
- Wireless DMX receiver

The "Flicker free on Camera" WR 80WB can also be used to good advantage in TV studios, in film studios or in theatres.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	WHITE BALANCE	80 white (5W) (40 - 3000K + 40 - 5000K)
Total light power		200W
Lumen		30000
Optics		70°x55° (antiglare square reflectors)
Power consumption		260W
Voltage range		Universal 100 - 240Vac
Physical		613x184x420 mm
Weight		15 Kg

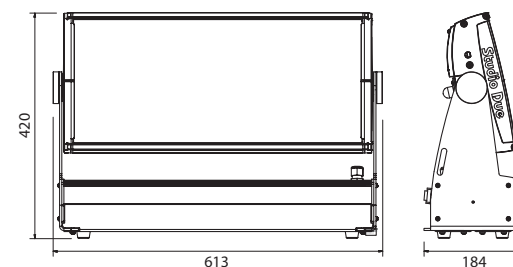

art. 14111: WR 80WB





ARCHIBAR SL200

White Balance and Monochromatic

- 4 different measures:
- High powerful LEDs
- Dimmable or plug-in version
- White Balance and Monochromatic version

[*Optional*]

- Wireless DMX receiver
- Fixing counterplate



Suitable for applications where the objet to lit isn't higher then 15 meters.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



The rear base of the fixture with the touch control panel

ITEM	FIXTURE	90cm standard	60cm	120cm	150cm
LEDs	Monochromatic	30 warm, neutral, cool	20 warm, neutral, cool	40 warm, neutral, cool	50 warm, neutral, cool
		On request: red, green, blue or amber			
LEDs	White Balance	15 (2900K) + 15 (6000K)	10 (2900K) + 10 (6000K)	20 (2900K) + 20 (6000K)	25 (2900K) + 25 (6000K)
Total light power		90W	60W	120W	150W
Lumen		12000	8000	16000	20000
Optics		medium beam (38 mm lenses) - On request: narrow, wide or 20°x30° beam			
Power consumption		100W	67W	135W	168W
Voltage range		Universal 100 - 240Vac			
Physical		925x110x93 mm (profile dim.)	632x110x93 mm (profile dim.)	1222x110x93 mm (profile dim.)	1517x110x93 mm (profile dim.)
Weight		6 Kg	-	-	-

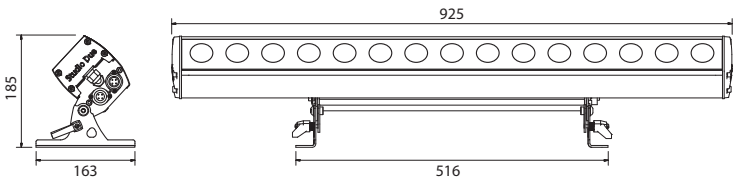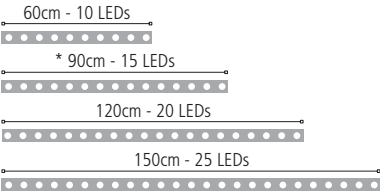

art. 15182: ARCHIBAR SL200/WB
art. 15181: ARCHIBAR SL200/M





ARCHIBAR SL100

White Balance and Monochromatic

led linear bar 43



- 4 different measures:
Standard 90 cm - 60 - 120 - 150 cm
- Dimmable or plug-in version
- White Balance and Monochromatic version




[Optional]

- Wireless DMX receiver
- Fixing counterplate

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	90cm standard	60cm	120cm	150cm
LEDs	Monochromatic	14 warm, neutral, cool	10 warm, neutral, cool	18 warm, neutral, cool	22 warm, neutral, cool
		On request: red, green, blue or amber			
LEDs	White Balance	7 (2900K) + 7 (6000K)	5 (2900K) + 5 (6000K)	9 (2900K) + 9 (6000K)	11 (2900K) + 11 (6000K)
Total light power		45W	32W	57W	70W
Lumen		5800	4200	7500	9150
Optics		medium beam (38 mm lenses) - On request: narrow, wide or 20°x30° beam			
Power consumption		52W	37W	66W	81W
Voltage range		Universal 100 - 240Vac			
Physical		944x93x115 mm	664x93x115 mm	1212x93x115 mm	1484x93x115 mm
Weight		3,8 Kg	-	-	-

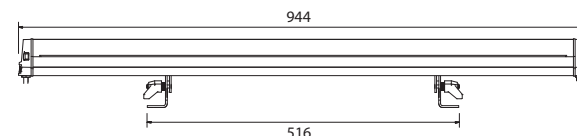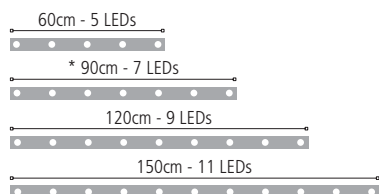

art. 15172: ARCHIBAR SL100/WB
art. 15171: ARCHIBAR SL100/M



ARCHIBAR ST80

White Balance and Monochromatic

- 3 different measures
- Configuration by DRS Setup
- Robust and reliable aluminium case




[Optional]

- Fixing counterplate


Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	standard 100cm [KEY features]	50cm [KEY features]	150cm [KEY features]
LEDs	Monochromatic	28x4 warm, neutral, cool	14x4 warm, neutral, cool On request: red, green, blue or amber	42x4 warm, neutral, cool
LEDs	White Balance	28x2 Cool White + 28x2 Warm White	14x2 Cool White + 14x2 Warm White	42x2 Cool White + 42x2 Warm White
Total light power		32W	16W	48W
Lumen		5200 (Cool W)	2600 (Cool W)	7800 (Cool W)
Optics		120° beam		
Power consumption		40W	20W	60W
Voltage range		Universal 100 - 240Vac		
Physical		1004x93x115 mm	526x93x115 mm	1481x93x115 mm
Weight		3,5 Kg	-	-

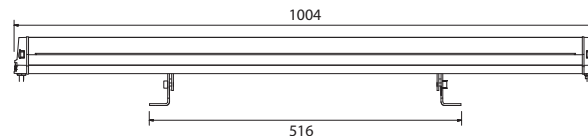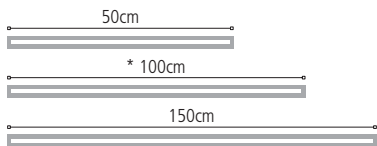

art. 1742: ARCHIBAR ST80/WB
art. 1741: ARCHIBAR ST80/M





SLIMBAR W

White



led linear bar 45

- Ultra small form factor aluminium case
- In-Out connectors for fast and easy wiring
- Available 100cm and 50cm lenghts

To drive SLIMBAR use SLIMBAR PILOT
Fixture colour finishing is grey.



ITEM	FIXTURE	100cm [KEY features]	50cm [KEY features]
LEDs	Monochromatic	30 (0,5W) mid-power NICHIA	15 (0,5W) mid-power NICHIA
Total light power		12W	6W
Lumen		1800	900
Optics		medium beam (20 mm lenses)	
Power consumption		48VDC	48VDC
Voltage range		Universal 100 - 240Vac	
Physical		1000x35x40 mm (profile dim.)	500x35x40 mm (profile dim.)
Weight		1 Kg	0,5 Kg

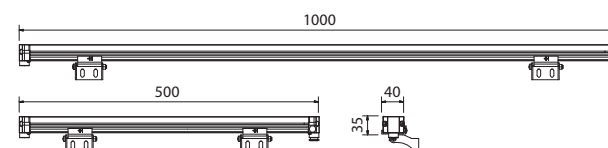

art. 1617: SLIMBAR WHITE





SLIMBAR FLAT

White Balance and Monochromatic

- Ultra small form factor aluminium case
- In-Out connectors for fast and easy wiring
- Available 100 cm and 50 cm lenght

[*Optional*]

- Light diffuser

The SLIMBAR FLAT MONOCHROMATIC is an ultra small form factor LED LINEAR BAR with IP67 rating protection. This kind of LED bar series is then suitable for accent lighting.



To drive SLIMBAR FLAT use SLIMBAR PILOT
Fixture colour finishing is grey.




Optional milk light diffuser



ITEM	FIXTURE	100cm [KEY features]	50cm [KEY features]
LEDs	Monochromatic	112 warm, neutral, cool On request: red, green, blue or amber	56 warm, neutral, cool
LEDs	White Balance	56 (2900K) + 56 (6000K)	28 (2900K) + 28 (6000K)
Total light power		35W	17W
Lumen	Monochromatic	5000	2500
	White Balance	2300 + 2600	1150 + 1300
Optics		120° beam	
Power consumption		42W max - 0,8A	21W max - 0,4A
Power supply		52VDC	
Physical		1000x46x30,5 mm (profile dim.)	500x46x30,5 mm (profile dim.)
Weight		1 Kg	0,5 Kg

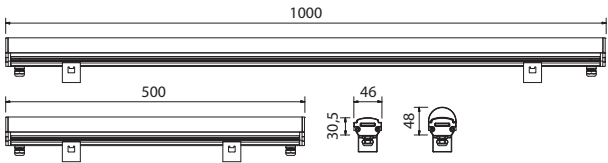

art. 1712: SLIMBAR FLAT/WB
art. 1711: SLIMBAR FLAT/M





PARSPOT 150/M

Monochromatic

led spot 47


- Plug-in flood light projector
- High powerful LEDs
- Robust and reliable case

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



Studio Due®

ITEM	FIXTURE	[KEY features]
LEDs	Monochromatic	19 (5000K) high power white On request: red, green, blue or amber
Total light power		70W
Lumen		8000
Optics		medium beam (38 mm lenses) On request: narrow or wide beam
Power consumption		75W
Voltage range		Universal 100 - 240Vac
Physical		268x100x240 mm
Weight		6 Kg

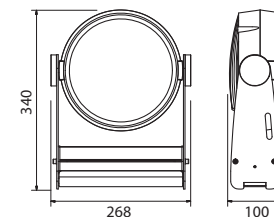

art. 1512: PARSPOT 150/M





PARLED 100/M

Monochromatic

- Clever design, small form factor
- IP 67 compact flood light projector
- Plug-in or dimmable version

[Optional]


- Barndoor

Very robust case, to ensure a very long term reliability specifically for harsh environments.

Fixture colour finishing is grey.



ITEM	FIXTURE	100/M and 100/M DRS [KEY features]
LEDs	Monochromatic	7 Hi-power white (warm, neutral, cool) On request: red, green, blue or amber
Total light power		34W
Lumen		4000
Optics		medium beam (32 mm lenses) On request: narrow or wide beam
Power consumption		38W
Voltage range		Universal 100 - 240Vac
Physical		185x140x230 mm
Weight		2 Kg

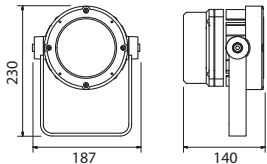

art. 1508: PARLED 100/M
art. 1509: PARLED 100/M DRS





PIN LIGHT

Monochromatic


- Compact and lightweight aluminium case
- Ultra narrow 1,5° optic
- Clever design, small form factor

Designed to create dramatic lighting effects, accurate and detailed projection on façades and architectural surfaces.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.



ITEM	FIXTURE	[KEY features]
LEDs	Monochromatic	1 (5W) white (warm, neutral, cool) On request: red, green, blue
Optics		1,5° ultra narrow beam
Power consumption		Has to work with dedicated power supply
Power supply		12V - 24V
Physical		WxDxH: 98x133x79,5mm
Weight		0,7 Kg



art. 1605: PIN LIGHT





ARIA

Monochromatic

- Stainless steel spotlights series
- 5, 3, 1 LEDs monochromatic

[Optional]

- On board power supply
- Long bracket

Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.

- IP 67 rating protection
- Optional IP 68
- Fixture finishing is steel.
- Optional: marine grade version.



AR-WL5



AR-WL3
(version with
on board power supply)




AR-WR
(version with
on board power supply)



M-AR-WL1

ITEM	FIXTURE	ARIA L5	ARIA L3	ARIA WR	MINI ARIA L1
LEDs	Monochromatic	5 white (10W)	3 white (10W)	1 white 50W LED array	1 white (10W)
Total light power			15W		5W
Lumen		2500	2100	2200	700
Optics		medium beam (38 mm lenses) On request: narrow, wide, 20°x30°	medium beam (45 mm lenses) On request: narrow and wide	Reflector	medium beam (45 mm lenses) On request: narrow and wide
Power consumption		Has to work with dedicated power supply			
Power supply		6,6VDC or 4,3VDC			
Physical		DxH: ø 134 x 108,5mm DxH: ø 134 x 143mm (model with on board power supply)			DxH: ø 72x105 mm
Weight		2,5 Kg			0,9 Kg

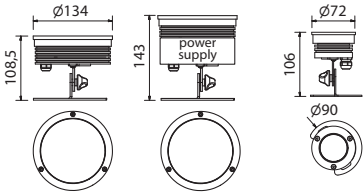

- art. 1430: AR-WR
art. 1431: AR-WL3
art. 1432: AR-WL5
art. 1541: M-AR-WL1





CL 160-80WR

Monochromatic High bay

- High brightness white LEDs (warm, neutral and cold)
- High efficient 70°x55° innovative optic system with antiglare reflectors

[Optional]

- DALI controller
- Wireless DMX receiver

For applications where robustness, reliability and the energy saving issues are mandatory.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.




CL 160WR



CL 80WR

ITEM	FIXTURE	CL 160WR version [KEY features]	CL 80WR version [KEY features]
LEDs	Monochromatic	160 white (5W)	80 white (5W)
Total light power		400W	200W
Lumen		50000	25000
Optics		70°x55° (antiglare square reflectors)	
Power consumption		450W	230W
Voltage range		Universal 100 - 240Vac	
Physical		651x540x166 mm	616x265x172 mm
Weight		25 Kg	12,5 Kg

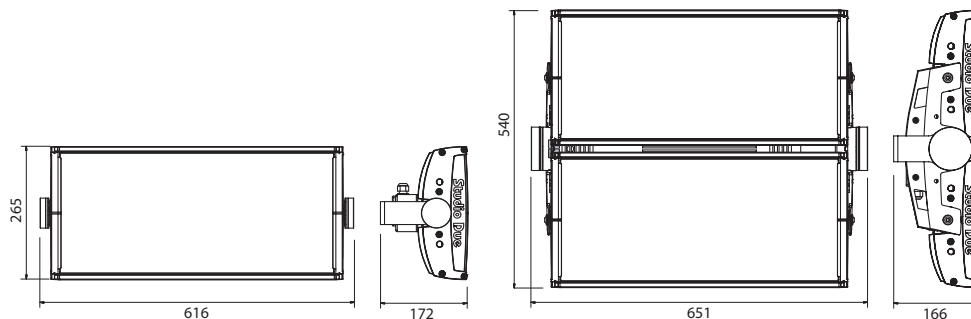

art. 1420: CL 160WR (high bay)
art. 1427: CL 80WR (high bay)





CL 120-60WL

Monochromatic High bay

- High brightness white LEDs (warm, neutral and cold)
- Innovative 20°x30° optic system for a rectangular projection

[Optional]

- DALI controller
- Wireless DMX receiver)

For applications where robustness, reliability and the energy saving issues are mandatory.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.




CL 120WL



CL 60WL

ITEM	FIXTURE	CL 120WL version [KEY features]	CL 60WL version [KEY features]
LEDs	Monochromatic	120 white (5W)	60 white (5W)
Total light power		360W	180W
Lumen		48000	24000
Optics		Square Open (20°x30°) 35mm lenses - On request: narrow and wide beam	
Power consumption		400W	200W
Voltage range		Universal 100 - 240Vac	
Physical		651x540x166 mm	616x265x172 mm
Weight		25 Kg	12,5 Kg

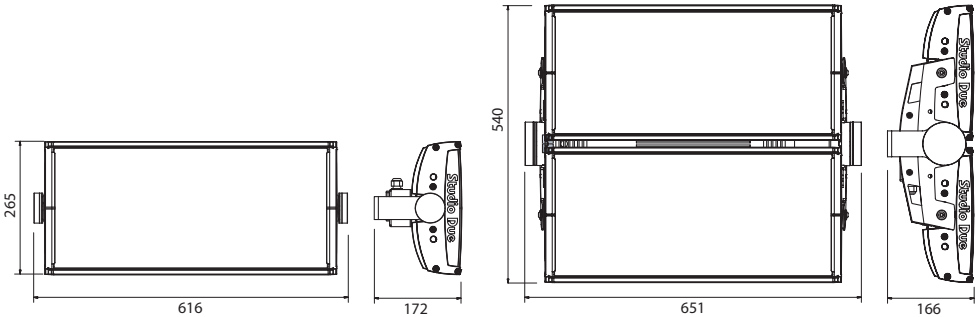

art. 1426: CL 120WL (high bay)
art. 1428: CL 60WL (high bay)





CR-i 80-40

Monochromatic indoor High bay

- High brightness white LEDs (warm, neutral and cold)
- High efficient 70°x55° innovative optic system with antiglare reflectors

Reliability and energy efficiency combined with lightness.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.




CR-i 80



CR-i 40

ITEM	FIXTURE	CR-i 80 version [KEY features]	CR-i 40 version [KEY features]
LEDs	Monochromatic	80 white (5W)	40 white (5W)
Total light power		130W	65W
Lumen		20000	10000
Optics		70°x55° (antiglare square reflectors)	
Power consumption		145W	75W
Voltage range		Universal 100 - 240Vac	
Physical		520x236x143 mm	280x236x143 mm
Weight		9,2 Kg	5,4 Kg

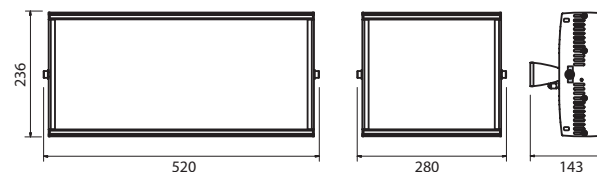

art. 1544: CR-i 80 (indoor high bay)
art. 1543: CR-i 40 (indoor high bay)





CL-i 80-40

Monochromatic indoor High bay

- High brightness white LEDs (warm, neutral and cold)
- Innovative 20°x30° optic system for a rectangular projection

Reliability and energy efficiency combined with lightness.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.




CL-i 80



CL-i 40

ITEM	FIXTURE	CL-i 80 version [KEY features]	CL-i 40 version [KEY features]
LEDs	Monochromatic	80 white (5W)	40 white (5W)
Total light power		130W	65W
Lumen		20000	10000
Optics		Square Open (20°x30°) 35mm lenses - On request: narrow and wide beam	
Power consumption		145W	75W
Voltage range		Universal 100 - 240Vac	
Physical		520x236x143 mm	280x236x143 mm
Weight		9,2 Kg	5,4 Kg

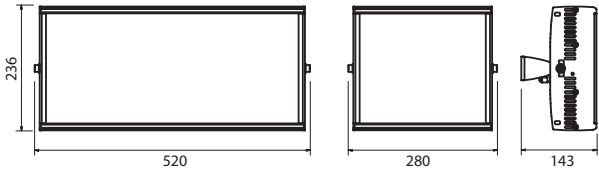

art. 1546: CL-i 80 (indoor high bay)
art. 1545: CL-i 40 (indoor high bay)





WR 80-40

Monochromatic

- High brightness white LEDs (warm, neutral and cold)
- High efficient 70°x55° innovative optic system with antiglare reflectors

Particularly adapt to light up objects from short distance.

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.




WR 40



WR 80

ITEM	FIXTURE	WR80 version [KEY features]	WR40 version [KEY features]
LEDs	Monochromatic	80 white (5W) On request: red, green, blue or amber	40 white (5W)
Total light power		200W	100W
Lumen		25000	12500
Optics		70°x55° (antiglare square reflectors)	
Power consumption		230W	120W
Voltage range		Universal 100 - 240Vac	
Physical		610x130x340 mm	350x130x340 mm
Weight		15 Kg	9 Kg

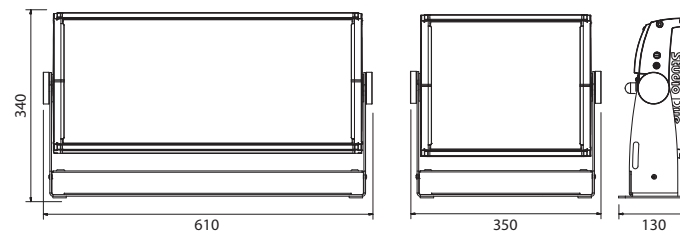

art. 1411: WR 80
art. 1410: WR 40





WL 60-30

Monochromatic

- High brightness white LEDs (warm, neutral and cold)
- Innovative 20°x30° optic system for a rectangular projection
- Available ULTRA NARROW lenses

With ultra narrow lens of 4° it's possible to light up objects from far away distance (more than 200 meters).

Standard fixture colour finishing is grey.
Optional: black and white (art. FX-COLOUR).
Optional: marine grade treatment.




WL 30



WL 60

ITEM	FIXTURE	WL60 version [KEY features]	WL30 version [KEY features]
LEDs	Monochromatic	60 white (5W) On request: red, green, blue or amber	60 white (5W)
Total light power		180W	90W
Lumen		24000	12000
Optics	WL60 - WL30 WL60 - WL30 (Ultrannarrow version)	Square Open (20°x30°) 35mm - On request: narrow and wide beam 4° ULTRA NARROW beam (35mm lenses)	
Power consumption		200W	100W
Voltage range		Universal 100 - 240Vac	
Physical		610x130x340 mm	350x130x340 mm
Weight		15 Kg	9 Kg

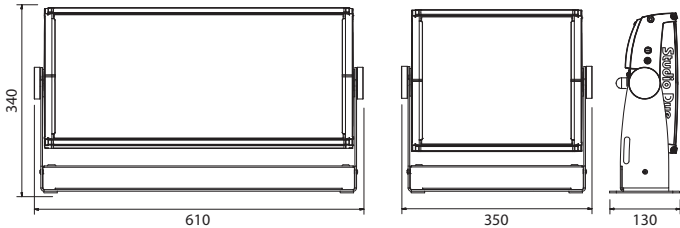

- art. 1409: WL 60
art. 14091: WL UN 60 (Ultra Narrow)
art. 1408: WL 30
art. 14081: WL UN 30 (Ultra Narrow)





TERRA

Monochromatic

inground led fixture 57

- Stainless steel inground series
- 1, 3, 5 LEDs monochromatic

[Optional]

- Plastic case
- On board power supply

Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.

IP 67 rating protection - Optional IP 68
Fixture finishing is steel.
Optional: marine grade version.



TER-WL5
(version with
on board power supply)



TER-WL3




TER-WR



M-TER-WL1

ITEM	FIXTURE	ARIA L5	ARIA L3	ARIA WR	MINI ARIA L1
LEDs	Monochromatic	5 white (10W)	3 white (10W)	1 white 50W LED array	1 white (10W)
Total light power			15W		5W
Lumen		2500	2100	2200	700
Optics		medium beam (38 mm lenses) On request: narrow, wide, 20°x30°	medium beam (45 mm lenses) On request: narrow and wide	Reflector	medium beam (45 mm lenses) On request: narrow and wide
Power consumption		Has to work with dedicated power supply			
Power supply		6,6VDC or 4,3VDC			
Physical		DxH: ø 190 x 47,5mm DxH: ø 190 x 82mm (model with on board power supply)			
Weight		2,5 Kg			

Studio Due®

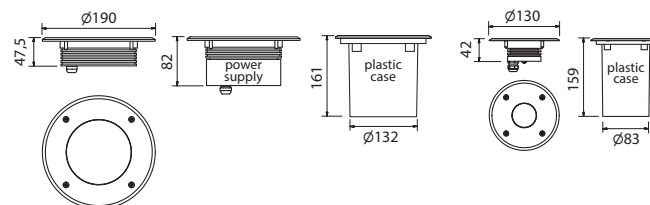

art. 1401: TER-WR
art. 14011: TER-WL3
art. 14012: TER-WL5
art. 1441: M-TER-WL1





WS 200-100

Monochromatic

- IP 66 compact LED light flood projector

Fixture colour finishing is grey.





WS 200 (W White)



WS 100 (C White)

ITEM	FIXTURE	WS200 version [KEY features]	WS100 version [KEY features]
LEDs	Monochromatic	48 white (5W) 3000K, 4000K, 5000K, 6000K - On request: red, green, blue or amber	24 white (5W)
Total light power		80W	40W
Lumen		24000	12000
Optics		120° beam	
Power consumption		100W	50W
Voltage range		Universal 100 - 240Vac	
Physical		530x75x285 mm	335x60x225 mm
Weight		5,4 Kg	2,7 Kg

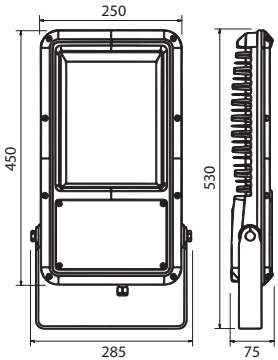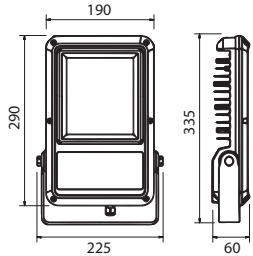

art. 1536: WS 200
art. 1535: WS 100





STR 60-40-30

White

- IP 66 compact white LED light flood projector
- Available in 3 different power

[Optional]
Connecting arm +90°/-90°
(for mounting on traditional poles
90mm to 60mm diameter)

Fixture colour finishing is grey.




STR with optional connecting arm



the optional connecting arm 0° - 90°

ITEM	FIXTURE	STR60 version [KEY features]	STR 40 version [KEY features]	STR 30 version [KEY features]
LEDs	Monochromatic	24 white 4000k (1W) CREE		
Total light power		57W	37W	27W
Lumen		5600	3800	3150
Optics		120° beam		
Power consumption		60W	40W	30W
Voltage range		Universal 100 - 240Vac		
Physical		450x250x66 mm - 628x250x80 mm (with connecting arm)		
Weight		5 Kg		

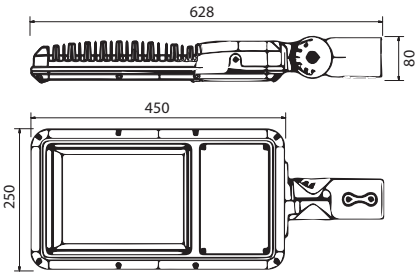

art. 1572: STR 60
art. 1573: STR 40
art. 1570: STR 30



CONTROL FIVE/C

Controller

Control Five/C is our 16 bit remote controller.

Easy to use it can be smartly used anywhere. Store up to 4000 scenes in 100 different programs, and each parameter can be 8/16 bit resolution.

Up to 40 fixtures can be controlled.

The controller can be synchronized with an external device by MIDI IN, DMX IN or MUSIC IN.

An Incremental cloche is available for precision moving head positioning, with associated two buttons to invert each axis (x - inversion, y - inversion)

Internal preset are available to create several automatic shapes in very short time and can be edited and stored in user memory.



- Voltage range: 100-240Vac
- WxDxH: 530x220x100mm
- Weight: 3,5 Kg

CONTROL SOFTWARE

Controller

It is a controller software for architectural and entertainment lighting. With Control Software you can create unlimited number of steps, scenes, programs, cycles, sequences, audio and live effects.

Included intelligent USB-DMX interface.

art. **3005**: CONTROL SOFTWARE



SPLITTER

Controller

This series of DMX Splitter has one input and one, four or eight outputs (3 pin) and absolute electrical isolation between the input and output or between the output and output.

art. **5001-8e**: SPLITTER 8 exit

art. **5001-4e**: SPLITTER 4 exit

art. **5001-1e**: SPLITTER 1 exit



Studio Due®

DRS Setup

DMX Remote Setup

The DRS is a simple set up commander that linked with the DMX input of a LED Lighting fixture allow to program all the functions of the luminaire. It's than possible to assign the DMX channel or use the Master/Slave function.

The device is powered through battery.

art. **1101**: DRS DMX REMOTE SETUP





Geofort - Herwijnen, Netherlands



KL Tower - Malesia

Puebla - Mexico



Sheraton Hotel - Kuwait



Porsche Platz, Stuttgart - Germany



Gdansk Bridge




The Cave - UK




Oslo - Norway



Palazzo Papale - (VT) Italy

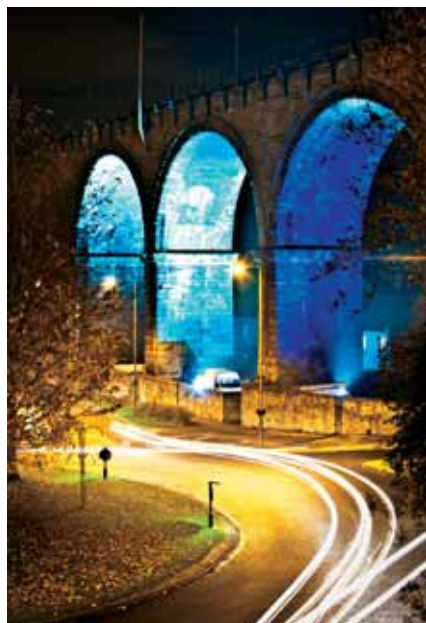

Scuola Grande della Misericordia - Venice, Italy

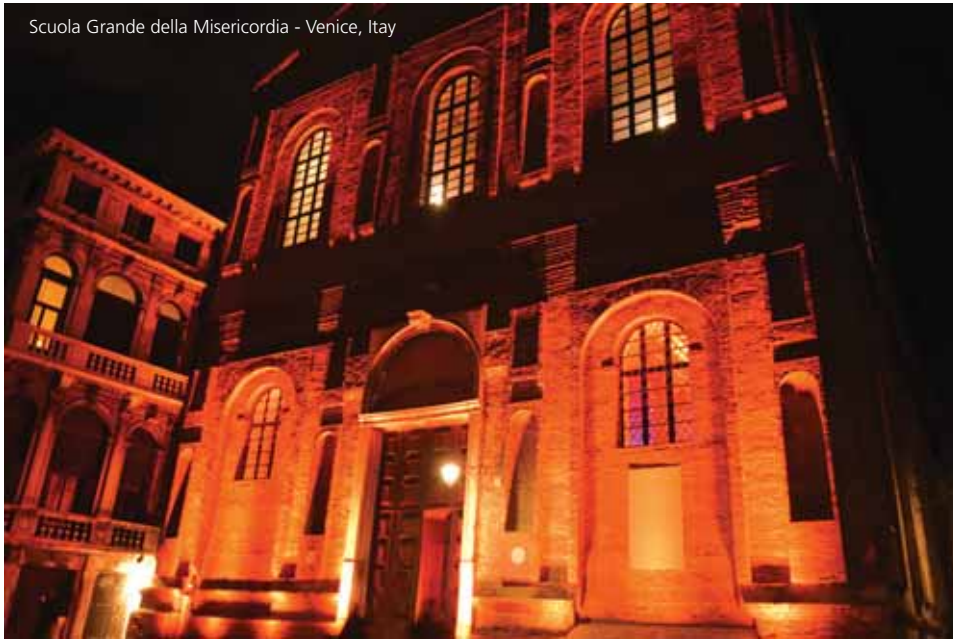

(photo Chris Kemp) Wind turbine



photo Paul Mariess - Castle Cornet for Dandelion Project - Happiness (UK)



Steibrua - Alvdal, Norway



Hotel - Tokyo



Castello di San Salvatore - (TV) Italy



note

note

Studio Due®



Studio Due[®]

emotion and creativity in light



Headquarters:

STUDIO DUE light s.r.l.

Str. Poggino, 100 - 01100 Viterbo (Italy)

tel. +39.0761.352520 (4 lines) - fax +39.0761.352653



STUDIO DUE UK

3 Encon Court, Owl Close

Moulton Park Industrial Estate

Northampton (England) UK - NN3 6 HZ

tel. +44.1933.650.820

www.studiodue.com - info@studiodue.com